

Product sheet – Traditional Line



Description of THD Cross

- ✓ French manufacturing is a guarantee of a sustainable sign
- ✓ 3 years guarantee: parts, workshop labor, costs of return transports and customer delivery
Extended warranty: + 3 additional years.
- ✓ Surrounding 3 or 4 rows of Leds with numerous preprogrammed animations
- ✓ Central THD display
- ✓ Displays the hour, date and temperature and a countdown from D-99
- ✓ Display programming by radio remote
- ✓ Classical or dynamic modes available for the THD module
- ✓ Brightness sensor allowing adjustment of LED consumption (day/night)
- ✓ Independent outline and THD module allowing a standby mode with only the THD display in operation
- ✓ Aluminium frame, plexiglas face
- ✓ Operating temperatures : -25 à to 60°C


Description of Graphic Cross

- ✓ French manufacturing is a guarantee of a sustainable sign
- ✓ 3 years guarantee: parts, workshop labor, costs of return transports and customer delivery
Extended warranty: + 3 additional years.
- ✓ Dynamic display of preprogrammed messages (hours, date, temperature...)
- ✓ Numerous preprogrammed animations with random or sequential display mode
- ✓ Graphic editor allowing customised logo design
- ✓ Two versions: preprogrammed or programmable by PC with wired pack or radio link
- ✓ Brightness sensor allowing adjustment of LED consumption (day/night)
- ✓ Standby mode allowing the automatic display of different messages during closing schedules of your pharmacy
- ✓ Aluminium frame, plexiglas face
- ✓ Operating temperatures : -25 to + 60°C





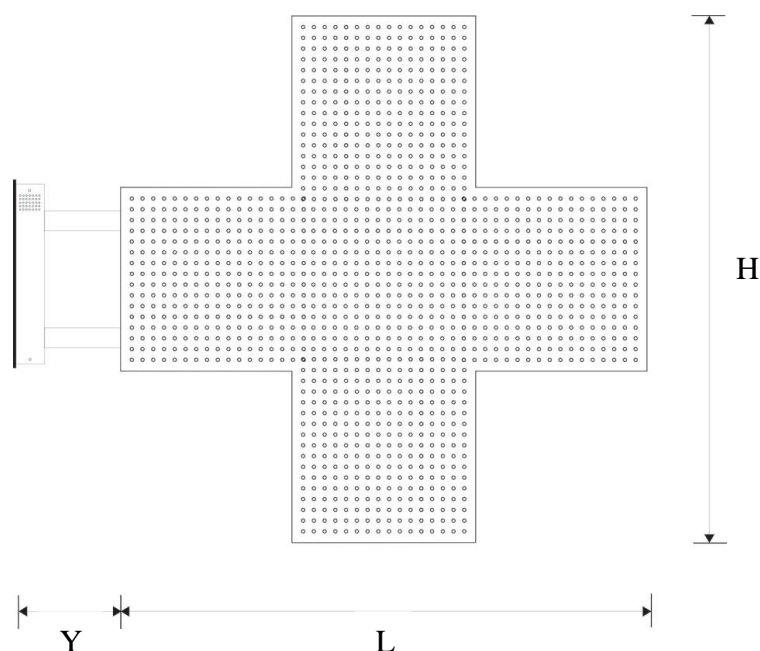

Customization

- ✓ Colour of the sign at your choice (colour chart RAL or PANTONE), or polished stainless steel
- ✓ Colours of the LED : red, amber, white, green, blue or purple (Led Lumex)
- ✓ The sign can be equipped with one face or two faces with LED
- ✓ Flag installation on a wall or a post or front installation (indoor or outdoor)

Detailed features



Model	Height (mm)	Width (mm)	Thickness (mm)	Display (mm)	Y (mm) min / max	Power in continuous mode Day (watt) / Night (watt)	LEDS Nber
Cross THD 90	890	890	55	812 x 812	100 / 400	120 / 40	1484
Cross THD 105	1050	1050	55	986 x 986	100 / 400	175 / 60	2204
Cross THD 125	1250	1250	55	1190 x 1190	100 / 200	225 / 75	2796
Graphic 80	790	790	55	732 x 732	100 / 400	115 / 40	1440
Graphic 105	1050	1050	55	975 x 975	100 / 400	215 / 70	2560

Characteristics of the Leds								
Reference	C503B-GCS/GCN-030-BO	C566C-GFN-YO	C503B-BCS/BCN-030-XO	C566C-BFN-UO	C503B-RCS/RCN6-YO	C566C-RFN-VO	C513A-WSS/WSN-YO	C503B-ACS/ACN-YO
Particularity	Very High Luminosity	Wide Angle	Very High Luminosity	Wide Angle	Very High Luminosity	Wide Angle	Very High Luminosity	Very High Luminosity
Angle	30	70 x 35	30	70 x 35	30	70 x 35	55	30
Intensity (cd)	23,5	8,2	5,86	2,13	8,2	3	8,2	8,2
Choice of the leds	✓	✓	✓	✓	✓	✓	✓	✓

